

FORGED STEEL FLANGES **APCO**


ASME B16.47 Series A / Modified Slip On



www.apcopipe.com / sales@apcopipe.com

B16.47 Series A Class 150#

Modified per Industry Standard to be Slip On

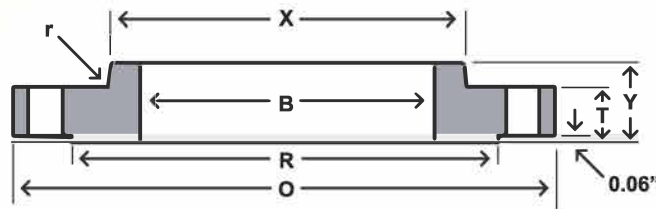

INDUSTRY STANDARD CLASS 150 SERIES "A" SLIP-ON FLANGES (BOLTING MATCHES)


Nom Size								Drilling			Weight
	OD	Thickness	RF Diameter	LTH	Hub Diameter	Min FR	Bore	# of Holes	Hole Dia	Circle Dia	
	O	T	R	Y	X	r	B		(B)		
26	34.25	2.69	29.50	3.69	28.25	0.38	26.25	24	1.38	31.75	235
28	36.5	3.06	31.50	3.81	30.50	0.44	28.25	28	1.38	34	270
30	38.75	3.31	33.75	3.94	32.50	0.44	30.25	28	1.38	36	305
32	41.75	3.41	36.00	4.18	34.50	0.44	32.25	28	1.63	38.5	375
34	43.75	3.68	38.00	4.25	36.50	0.50	34.25	32	1.63	40.5	400
36	46	3.96	40.25	4.56	38.75	0.50	36.25	32	1.63	42.75	450
38	48.75	4.06	42.25	4.56	41.25	0.50	38.25	32	1.63	45.25	530
40	50.75	4.18	44.25	4.81	43.25	0.50	40.25	36	1.63	47.25	570
42	53	4.43	47.00	5.06	45.50	0.50	42.25	36	1.63	49.5	650
44	55.25	4.68	49.00	5.18	47.75	0.50	44.25	40	1.63	51.75	690
46	57.25	4.86	51.00	5.31	49.75	0.50	46.25	40	1.63	53.75	730
48	59.5	5.06	53.50	5.56	52.00	0.50	48.25	44	1.63	56	800

DIMENSIONS ARE IN INCHES

- (A) These flanges will be supplied with a 1/16" raised face unless otherwise specified
 (B) Dimensions are supportive from industry terminology and are a non-committee specification
 (C) These flanges are not covered by ASME B16.47 or MSS-SP44 specifications

B16.47 Series A Class 300#

Modified per Industry Standard to be Slip On

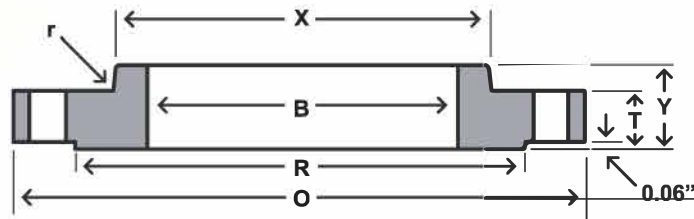

INDUSTRY STANDARD CLASS 300 SERIES "A" SLIP-ON FLANGES (BOLTING MATCHES)

Nom Size								Drilling			Weight
	OD	Thickness	RF Diameter	LTH	Hub Diameter	Bore	Min FR	# of Holes	Hole Dia	Circle Dia	
	O	T	R	Y	X	B	r		{B}		
26	38.25	3.12	29.50	5.37	30.25	0.38	26.25	28	1.75	34.50	595
28	40.75	3.38	31.50	5.68	32.75	0.44	28.25	28	1.75	37.00	729
30	43.00	3.62	33.75	6.12	34.75	0.44	30.25	28	1.88	39.25	840
32	45.25	3.88	36.00	6.56	36.75	0.44	32.25	28	2.00	41.50	964
34	47.50	4.00	38.00	6.81	38.75	0.50	34.25	28	2.00	43.50	1076
36	50.00	4.12	40.25	7.06	41.00	0.50	36.25	32	2.12	46.00	1202
38	46.00	5.31	40.50	6.06	39.00	0.50	38.25	32	1.62	43.00	687
40	48.75	5.56	42.75	6.56	41.25	0.50	40.25	32	1.75	45.50	840
42	50.75	5.81	44.75	6.81	43.25	0.50	42.25	32	1.75	47.50	922
44	53.25	6.06	47.00	6.86	45.25	0.50	44.25	32	1.88	49.75	1055
46	55.75	6.31	49.00	7.06	47.25	0.50	46.25	28	2.00	52.00	1205
48	57.75	6.56	51.25	7.18	49.25	0.50	48.25	32	2.00	54.00	1306

DIMENSIONS ARE IN INCHES

- (A) These flanges will be supplied with a 1/16" raised face unless otherwise specified
 (B) Dimensions are supportive from industry terminology and are a non-committee specification
 (C) These flanges are not covered by ASME B16.47 or MSS-SP44 specifications



APCO PIPE FITTINGS CO., LTD.

No.50, Shiji Road South, Gao Xin Area, Yingkou 115004, China.

Tel: 86-417-4830203/4893777

Fax: 86-417-4831175

M.p.: 13604329272

Email: sales@apcopipe.com

[Http://www.apcopipe.com](http://www.apcopipe.com)